

SINUS 08NC110-R2

English



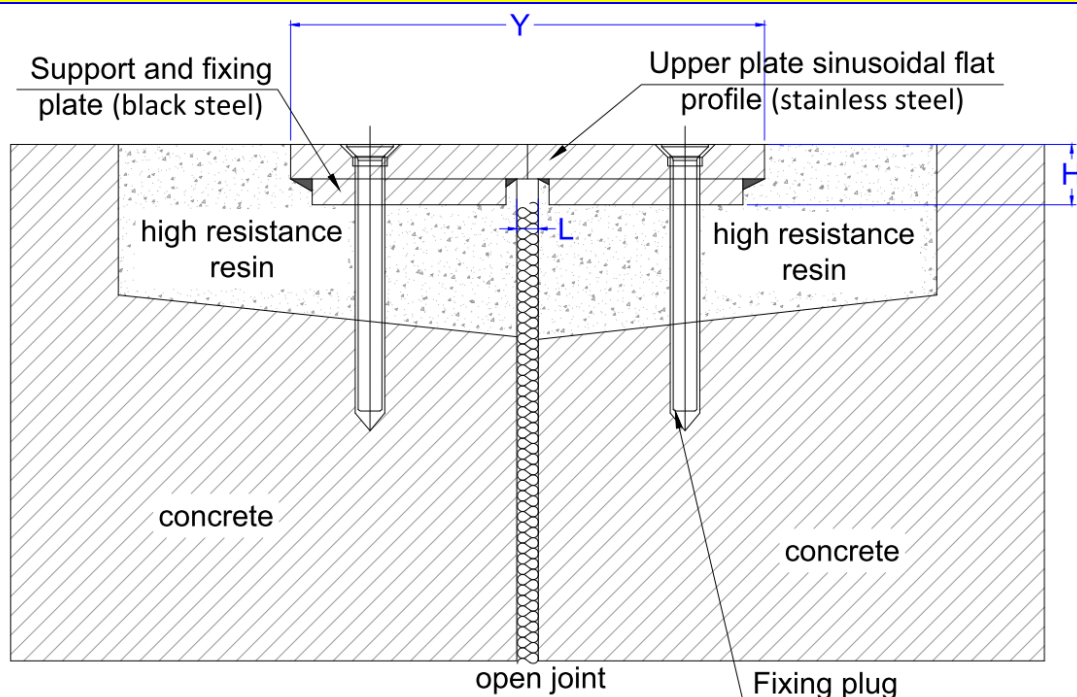
DESCRIPTION

Flat steel profile with sinusoid dilatation gap for heavy loads, especially for reparation ready damaged concrete floors. It is mounted with flat bars into concrete floor (flat bars are removed after hardening of reparations layer).

Double protection of concrete plate edges. You can also order steel profile or galvanized profile.




Standard bar length 2,90 Im

MOUNTING



Art.	L mm*	H mm*	Y mm*
SINUS 08NC110-R2	fino a 10	(8 + 6) = 14	110

*tolerance +/- 2 mm

CAPACITY LAOD**		FIXING**
	Pedestrians, shopping cars, gurneys, light trolleys.	Mounted using mechanical plugs.
	Cars and trucks with pneumatic wheel up to 600 kN.	
	Forklifts with pneumatic wheel up to 70 kN.	

** The capacity load shown is only guaranteed if the mounting instructions have been correctly followed.

This drawing is our property and can't be reproduced or transmitted to other persons without our authorization.